


## TRANSPORT & WORKING

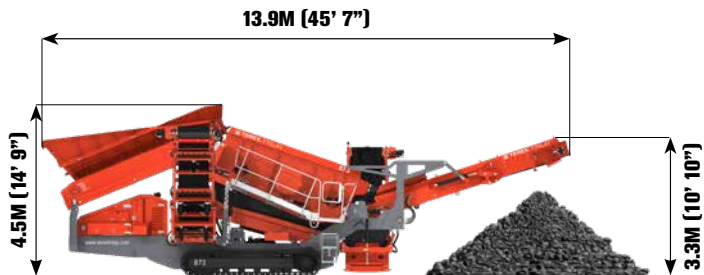

## WEIGHT

26,300KG (57,982LBS)

STANDARD MACHINE CONFIGURATION



# 873

The NEW Terex Finlay 873 is ideally suited to working in aggregates, sand and gravel, top soil, construction demolition and recycling applications. This highly versatile machine can be fed either by a tracked mobile crusher, shovel or an excavator and has the capacity to process at a rate of up to 450 Tonnes per hour.

Now available with dual power technology option. On-board electrical motors allow flexibility to run from an outside power supply or standard on-board engine.

## KEY FEATURES

- Screen box angle can be hydraulically adjusted to an angle between 13° to 19°.
- Screen box discharge end raises hydraulically 500mm to facilitate mesh changing.
- Screen box can accept punch plate, cascade fingers, bofar bars and speedharps.
- Galvanised access catwalk on both side of screen.
- Oversize conveyor angle can be adjusted from 18° to 24°.
- 1.2m wide Belt feeder complete with 7m<sup>3</sup> manual folding hopper.