


The Terex Finlay 684 is a compact easily transportable machine that offers operators rapid set up and tear down times. The screenbox features two large 4.3m x 1.7m (14' x 5' 7") inclined screen decks giving a large screening area to provide efficient screening and high capacity. The screenbox features quick wedge tensioning on the top deck, access holes and bottom deck hydraulic tensioning system to reduce time required for mesh changes. All three discharge conveyors are adjustable and hydraulically fold for transport.

KEY FEATURES

- Double deck 4.3m x 1.7m (14' x 5' 7") screen with full catwalk access.
- Maximum utilisation of the two 4.3m x 1.7m (14' x 5' 7") decks provides ultra-efficient screening capabilities even at small aggregate sizes.
- A combination of quick wedge tensioning on the top deck, convenient access holes and hydraulic tensioning on the bottom deck ensure mesh set up and change out times are kept to an absolute minimum.

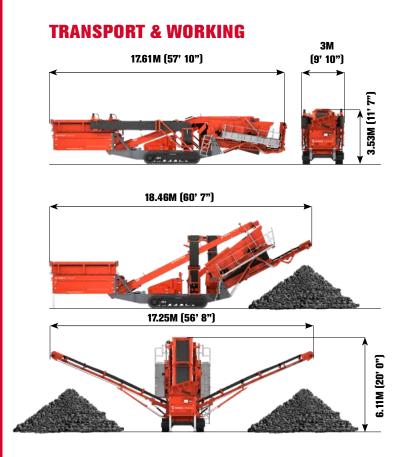

WEIGHT

28,750KG (63,380LBS) (WITH TIPPING GRID)

